



Kima GG10

Thin floor construction in wet and dry areas. Ordinary concrete constructions in wet and dry rooms.

Specifications:

- Flameretardent heating cable, twin conductor with no electro-magnetic fields.
- Insulation class I.
- IP-class 67.
- Operating temperature max +70°C.
- Mechanical Strength; armoured class C according to EN60800.
- Voltage - 230 volt.
- Wattage - 10 W/m.
- 2 meter coldtail.
- Manufactured according to standard EN60800, S4242411.

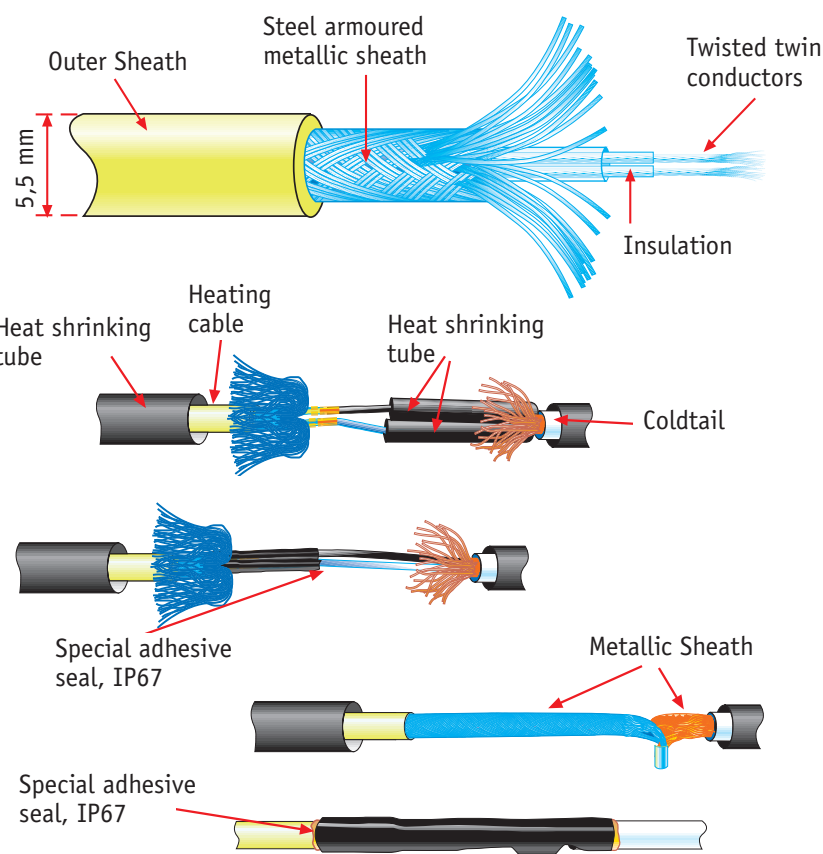

100 W/m² = C/C 10 cm
 75 W/m² = C/C 13,5 cm
 67 W/m² = C/C 15 cm
 50 W/m² = C/C 20 cm
 40 W/m² = C/C 25 cm

Part no.	EAN no.	Length (m)	Wattage (W)	m ² *	Voltage (V)	Tolerance total (Ohm)
E 89 877 01	7331002902348	13	130	1,3	230	387 - 448
E 89 877 02	7331002902355	22	220	2,2	230	228 - 265
E 89 877 03	7331002902362	30	300	3,0	230	168 - 194
E 89 877 04	7331002902379	43	430	4,3	230	117 - 135
E 89 877 05	7331002902386	52	520	5,2	230	97 - 112
E 89 877 06	7331002902393	63	630	6,3	230	80 - 92
E 89 877 07	7331002902409	70	700	7,0	230	72 - 83
E 89 877 08	7331002902416	80	800	8,0	230	63 - 73
E 89 877 09	7331002902423	91	910	9,1	230	55 - 64
E 89 877 10	7331002902430	100	1000	10,0	230	50 - 58
E 89 877 12	7331002902447	117	1170	11,7	230	43 - 50
E 89 877 13	7331002902607	130	1300	13,0	230	39 - 45
E 89 877 14	7331002902454	142	1420	14,2	230	35 - 41
E 89 877 16	7331002902614	160	1600	16,0	230	31 - 36
E 89 877 18	7331002902461	182	1820	18,2	230	28 - 32

* At 100 W/m² c/c 10 cm.

PROD00101006 070607