


Kima Green

Thin floor construction in wet and dry areas. Under floor heating under wooden floor (parquett, laminated, solid wood) in combination with KIMA Lamiflex on top of an existing thermal insulated floor construction in dry rooms. Frost protection waterpipes. Approved to be installed in and on the waterpipe. Perma frostprotection of freezer rooms floor.


Specifications:

- Flameretardent heatingcable, twin conductor with no electromagnetic fields. Approved to be installed in and on waterpipes.
- Insulationclass I.
- IP-class 67.
- Operating temperatur max +70°C.
- Mecanical Strenght; armoured class C according to EN60800.
- Voltage - 230 volt.
- Wattage - 7,5 W/m.
- 2 meter coldtail.
- Manufactured according to standard EN60800, S4242411.

CE



- 100 W/m² = C/C 8 cm
- 80 W/m² = C/C 10 cm
- 75 W/m² = C/C 10,5 cm
- 60 W/m² = C/C 13,5 cm
- 54 W/m² = C/C 15 cm
- 40 W/m² = C/C 20 cm
- 32 W/m² = C/C 25 cm
- 27 W/m² = C/C 30 cm
- 23 W/m² = C/C 35 cm
- 20 W/m² = C/C 40 cm
- 18 W/m² = C/C 45 cm

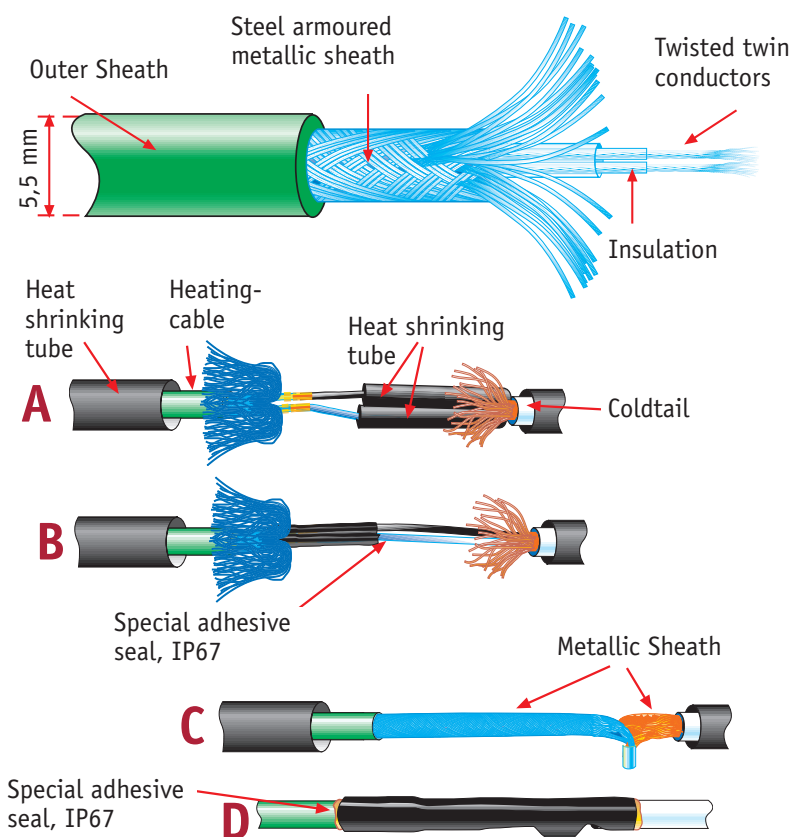

Part no.	EAN no.	Length (m)	Wattage (W)	m ² *	Voltage (V)	Tolerance total (Ohm)
E 89 876 01	7331002902010	2	15		230	3350 - 3879
E 89 876 02	7331002902027	3	23		230	2185 - 2530
E 89 876 03	7331002902034	4	30		230	1675 - 1940
E 89 876 04	7331002902041	6	44		230	1142 - 1323
E 89 876 05	7331002902058	8	60		230	838 - 970
E 89 876 06	7331002902065	10	75	1,0	230	670 - 776
E 89 876 07	7331002902072	15	110	1,5	230	457 - 529
E 89 876 08	7331002902089	20	150	2,0	230	335 - 388
E 89 876 09	7331002902096	25	190	2,5	230	265 - 306
E 89 876 10	7331002902102	30	225	3,0	230	223 - 259
E 89 876 11	7331002902119	35	260	3,5	230	193 - 224
E 89 876 12	7331002902126	40	300	4,0	230	168 - 194
E 89 876 13	7331002902133	45	340	4,5	230	148 - 171
E 89 876 14	7331002902140	50	375	5,0	230	134 - 155
E 89 876 15	7331002902157	60	450	6,0	230	112 - 129
E 89 876 16	7331002902164	80	600	8,0	230	84 - 97
E 89 876 17	7331002902171	105	790	10,5	230	64 - 74
E 89 876 18	7331002902188	135	1015	13,5	230	50 - 57

*At 75 W/m² c/c 10,5 cm.

PRO00101004-070607

KIMA Heating Cable AB • Box 2024, SE-281 02 Hässleholm • Tel +46 451 38 30 60



www.kima.se